

10x10mm single color top view led neon strip DC12V



◆ Product Description:

This neon strip is top view with a translucent silicone rubber as a diffuser, light uniform and no spot. It is designed to be bent up to down with light projecting upwards.

This silicone rubber is anti-UV, anti-aging, anti-yellowing, environmental protection, non-toxic, and very soft. Use highlighted 2835 LED chips, it's long life, low light decay, and good color consistency.

Standard length is 5M/roll, length can be customized, there are cutting marks on the side.


IP65 waterproof for outdoor use

Each roll includes 10pcs alu clips for installation (2pcs/m)

◆ Product parameter

Product Number	N010120BB1LZ	Lumens/M	W: 580lm
Voltage	DC12V	Ra	≥ 80
Power/M	7.2W	Beam Angle	150°
SMD Type	SMD 2835	Size (mm)	5000x10x10mm
LED Qty/M	120	IP Rate	IP65
Color	R/G/B/W:3000K/4000K/6000K	Operation Temperature	- 25 ~ 60 °C
Pixel/M	/	Material	Silicone
Control	/	Cutting Length	25mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	0.5Kg


◆ Outline Dimension (unit: mm)

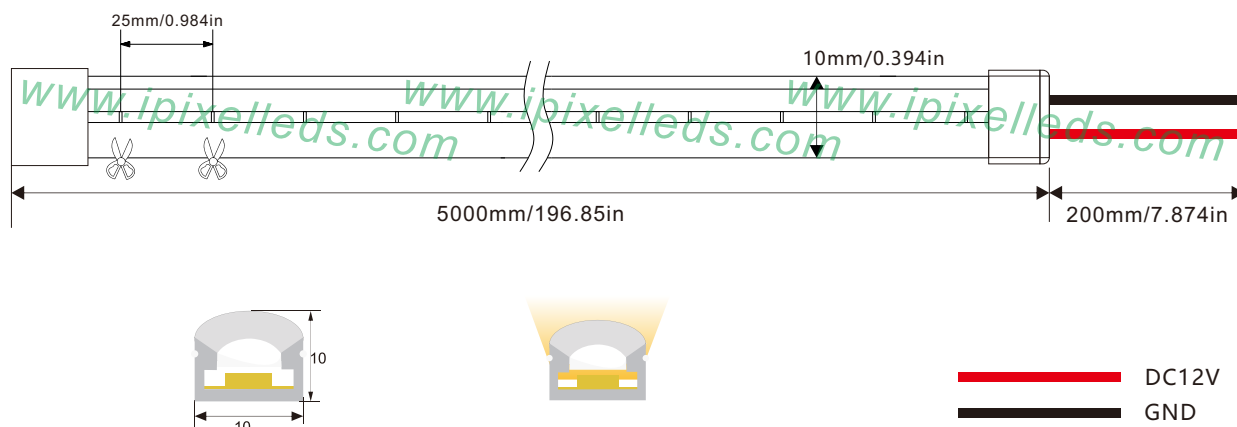

◆ Order number

DC12V	R	White PCB	IP65	N010120BB1LZ/C1
DC12V	G	White PCB	IP65	N010120BB1LZ/C2
DC12V	B	White PCB	IP65	N010120BB1LZ/C3
DC12V	3000 K	White PCB	IP65	N010120BB1LZ/C4
DC12V	4000 K	White PCB	IP65	N010120BB1LZ/C5
DC12V	5000 K	White PCB	IP65	N010120BB1LZ/C6
DC12V	6000 K	White PCB	IP65	N010120BB1LZ/C7

◆ Wiring diagram


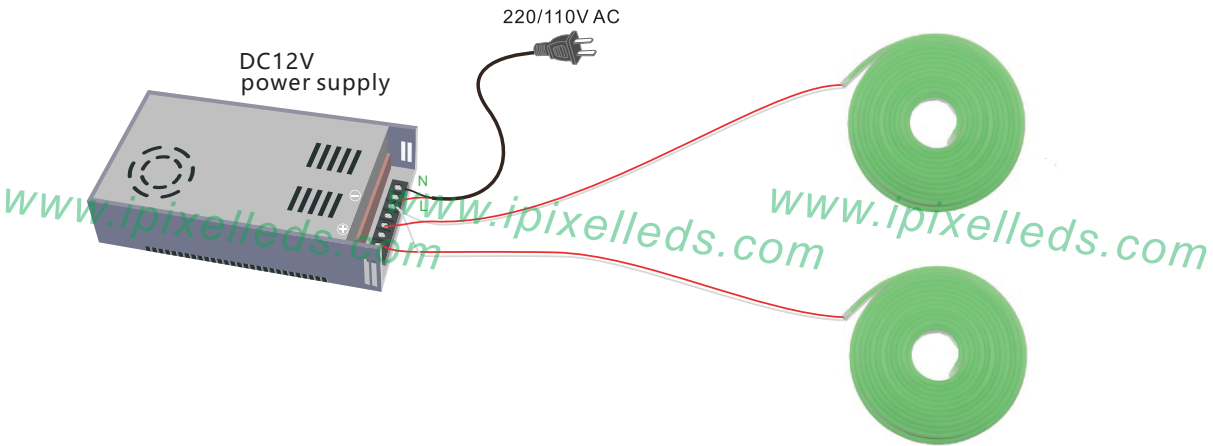


◆ Accessories

Name	Stainless steel Clip	Silicone glue	The front cover	End cap
Installation	Standard 		Standard 	
Remarks	30*10.8*8.4mm	10 ml /pc		

Note: The parameters are subject to change without notice!

◆ Correct bending way

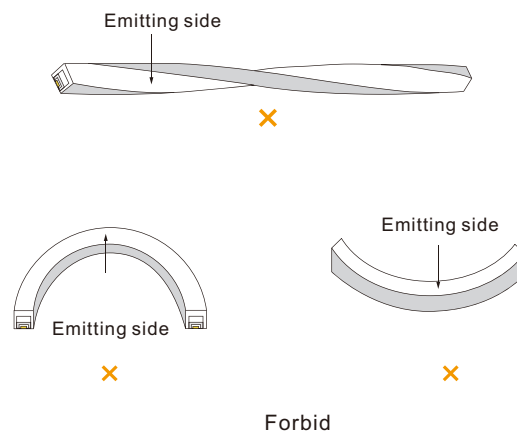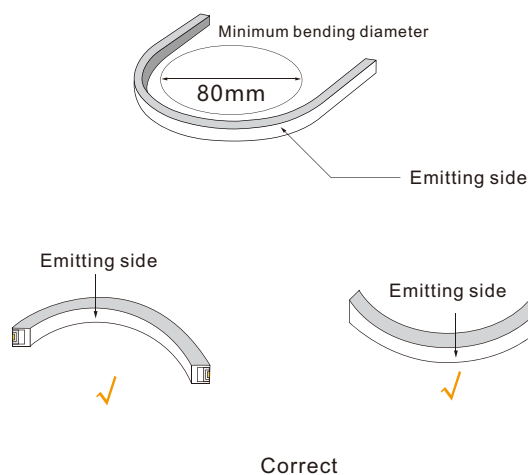



◆ Accessories



Stainless steel clip
20x10.8x8.4mm(LxWxH)



Aluminum profile
1000x10.8x8.4mm(LxWxH)

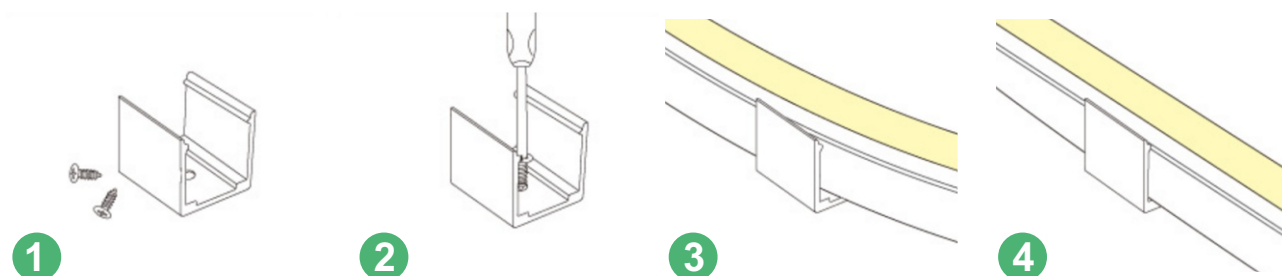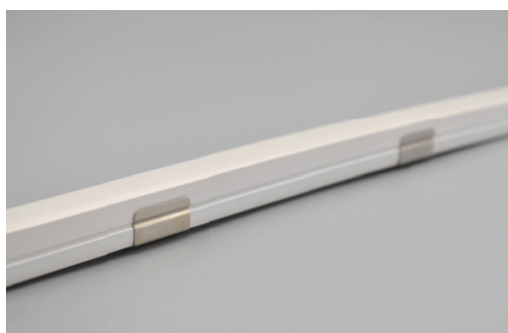

Note: The parameters are subject to change without notice!